


Pressure Reducing Device Angle Valve 175 Lb. Rated

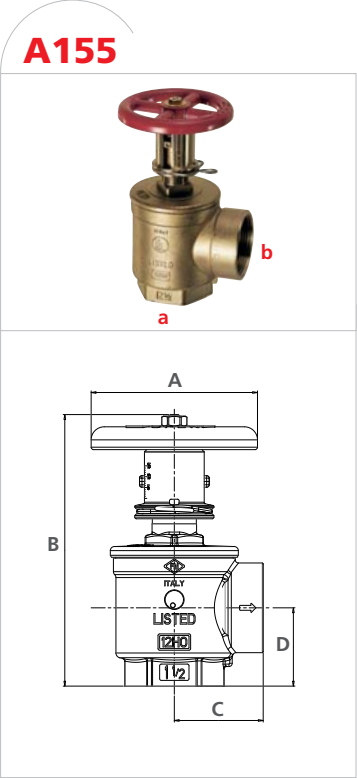

- Adjustable restriction of residual pressures up to 175 lb. Locking pin device restricts full opening of valve by untrained personnel, pin may be removed by firefighters to allow full opening of valve.

DOUBLE FEMALE

Standard equipment:
Female NPT inlet and outlet forged brass valve.
Red hand wheel.


Optional Finishes:
PB
RC
PC

CERTIFICATIONS		
CE x 1258	LISTED 12HO	

a	b
1-1/2"	1-1/2"
2-1/2"	2-1/2"

	1-1/2" x 1-1/2"	2-1/2" x 2-1/2"
A	4-1/64"	5-1/8"
B	7-3/32"	9-31/32"
C	2-9/64"	3-5/16"
D	1-57/64"	2-41/64"

Pressure Reducing Device Angle Valve 175 Lb. Rated

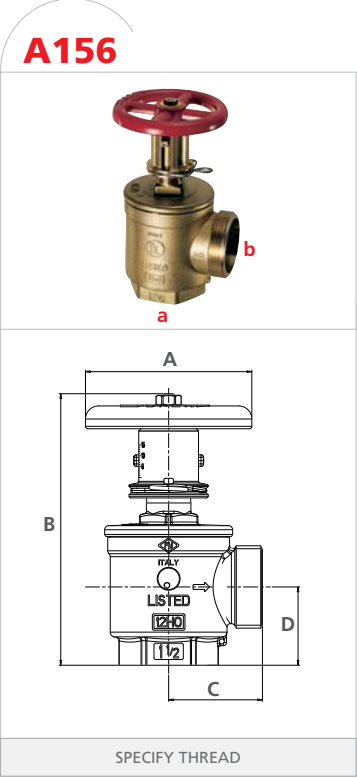

- Adjustable restriction of residual pressures up to 175 lb. Locking pin device restricts full opening of valve by untrained personnel, pin may be removed by firefighters to allow full opening of valve.

FEMALE X MALE

Standard equipment:
Female NPT inlet x male hose thread outlet forged brass valve.
Red hand wheel.

Optional Finishes:
PB
RC
PC

CERTIFICATIONS		
CE x 1258	LISTED 12HO	

a	b
1-1/2"	1-1/2"
2-1/2"	2-1/2"

	1-1/2" x 1-1/2"	2-1/2" x 2-1/2"
A	4-1/64"	5-1/8"
B	7-3/32"	9-31/32"
C	2-17/64"	3"
D	1-57/64"	2-41/64"