


Ball valves

Geberit Mapress ball valve, with lever

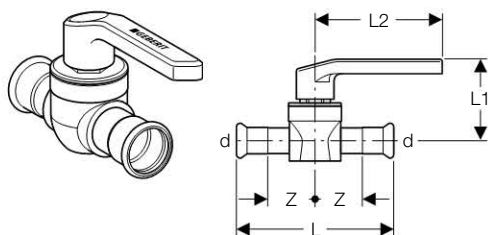

Application Purpose

- For drinking water installations

Characteristics

- Leaky if unpressed
- Ball and spindle made of brass, PTFE-coated
- No dead space, valve completely scoured out
- Valve top replaceable

Product Details

Operating temperature	-20 – +90 °C
Product material	CrNiMo steel 1.4401 (DIN EN 10088)

Scope Of Delivery


- Seal rings CIIIR black
- Colour codes (red, blue)

Ordering Information

Article no.	dØ [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]
94942	15	10,2	5,8	9,2	3,1	16
94943	18	10,4	5,8	9,2	3,2	16
94944	22	11,6	6,1	9,2	3,7	16
94945	28	13,4	7,2	12,4	4,4	16
94946	35	15,4	7,6	12,4	5,1	16
94947	42	17,7	8,3	14,7	5,9	16
94948	54	20,6	8,8	14,7	6,8	16

Bulkhead and deck passings

Geberit Mapress bulkhead and deck passing with plain ends

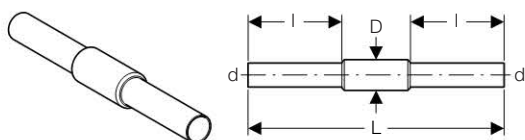

Application Purpose

- To weld into ship bulkheads

Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
------------------	------------------------------------

Ordering Information

Article no.	dØ [mm]	L [cm]	l [cm]
90980	15	45	16,5
90981	18	45	16,5

Article no.	dØ [mm]	L [cm]	l [cm]
90982	22	45	16,5
90983	28	45	16,5
90984	35	45	16,5
90985	42	45	16,5
90986	54	45	16,5
90987	76,1	45	16,5
90988	88,9	45	16,5
90989	108	45	16,5

Closures

Geberit Mapress cap



Application Purpose

- For sanitary and industrial applications
- For heating installations
- For closing pipe ends

Characteristics

- Leaky if unpressed
- With pressing indicator

Product Details

Product material	CrNiMo steel 1.4401 (DIN EN 10088)
------------------	------------------------------------

Ordering Information

Article no.	dØ [mm]	L [cm]	Z [cm]
33212	15	2,3	0,3
33213	18	2,3	0,3
33214	22	2,4	0,3
33215	28	2,6	0,3
33216	35	2,9	0,3
33217	42	3,3	0,3
33218	54	3,8	0,3
33219	76,1	6	0,7
33220	88,9	6,7	0,7
33221	108	8,2	0,7

