




HDPE Electrofusion

Geberit electrofusion sleeve coupling

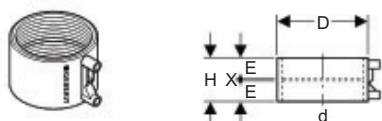

Application Purpose

- For all drainage pipes
- For plugging or pushing onto pipes and fittings
- For tension resistant connection of pipes and fittings

Characteristics

- UV-resistant
- Can be welded with Geberit electrofusion machine ESG 40/200


Product Details

Product material	HDPE
------------------	------

Ordering Information

Article no.	dØ [mm]	D [cm]	E [cm]	X [cm]	H [cm]
360.771.16.1	40	5,2	2,8	0,3	6
361.771.16.1	50	6,2	2,8	0,3	6
363.771.16.1	56	6,8	2,8	0,3	6
364.771.16.1	63	7,6	2,8	0,3	6
365.771.16.1	75	8,9	2,8	0,3	6
366.771.16.1	90	10,4	2,8	0,3	6
367.771.16.1	110	12,5	2,8	0,3	6
368.771.16.1	125	14,2	2,8	0,3	6
312.771.16.1	135	15	2,8	0,3	6
369.771.16.1	160	17,8	2,8	0,3	6

Geberit electrofusion coupling with integrated thermal fuse



Application Purpose

- For all drainage pipes
- For plugging or pushing onto pipes and fittings
- For tension resistant connection of pipes and fittings

Characteristics

- UV-resistant
- Integrated heat fuse
- Can be welded with Geberit start switch ESG-T2
- Heat-insulated


Product Details

Product material	HDPE
------------------	------

Ordering Information

Article no.	dØ [mm]	D [cm]	E [cm]	H [cm]
370.775.16.1	200	22,4	7,5	15
371.775.16.1	250	27,5	7,5	15
372.775.16.1	315	34,3	7,5	15

Geberit electrofusion tape for anchor bracket

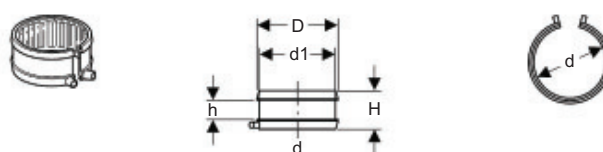

Application Purpose

- For anchor-point fastening of pipes in conjunction with pipe brackets

Characteristics

- 1-section
- Can be welded with Geberit electrofusion machine ESG 40/200


Product Details

Product material	PE
------------------	----

Ordering Information

Article no.	dØ [mm]	d1Ø [mm]	D [cm]	H [cm]	h [cm]
361.776.16.1	50	58	6,6	6	3
363.776.16.1	56	64	7,2	6	3
364.776.16.1	63	71	7,9	6	3
365.776.16.1	75	83	9,1	6	3
366.776.16.1	90	98	10,6	6	3
367.776.16.1	110	118	12,6	6	3
368.776.16.1	125	133	14,1	6	3
369.776.16.1	160	168	17,6	6	3
370.776.16.1	200	208	21,6	6	3
371.776.16.1	250	258	26,6	6	3

Set Geberit electrofusion tape for anchor bracket (2-piece)

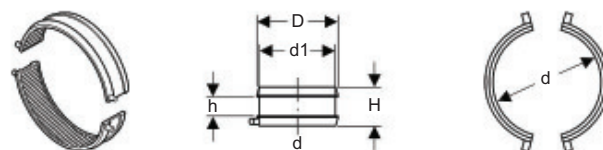

Application Purpose

- For anchor-point fastening of pipes in conjunction with pipe brackets

Characteristics

- 2-sections
- Can be welded with Geberit electrofusion machine ESG 40/200

Product Details

Product material	PE
------------------	----

Ordering Information

Article no.	dØ [mm]	d1Ø [mm]	D [cm]	H [cm]	h [cm]
372.776.16.1	315	323	33,1	6	3