


Geberit Mepla adapter with male thread

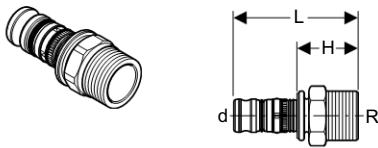

Application Purpose

- For sanitary, heating and industrial purposes

Characteristics

- No oxygen diffusion
- Leaky if unpressed
- Male thread

Product Details

Product material	Gunmetal
------------------	----------


Scope Of Delivery

- O-ring EPDM

Ordering Information

Article no.	dØ [mm]	R ["]	H [cm]	L [cm]
601.535.00.5	16	1/2	2,8	5,4
601.536.00.5	16	3/4	3,1	5,7
602.535.00.5	20	1/2	3	5,7
602.536.00.5	20	3/4	3,1	5,9
603.535.00.5	26	1/2	3,1	6,3
603.536.00.5	26	3/4	3,2	6,4
603.537.00.5	26	1	3,5	6,7
604.537.00.5	32	1	3,6	6,4
604.538.00.5	32	1 1/4	3,9	6,6
605.537.00.5	40	1	3,7	7,1
605.538.00.5	40	1 1/4	4	7,4
605.539.00.5	40	1 1/2	4,1	7,5
606.537.00.5	50	1 1/2	4,2	8
606.540.00.5	50	2	4,7	8,4
607.539.00.5	63	2	5	11,7
607.541.00.5	63	2 1/2	5,8	12,5
608.541.00.5	75	2 1/2	6	14,7

Geberit Mepla adapter with female thread

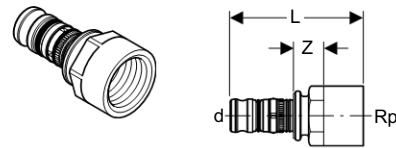

Application Purpose

- For sanitary, heating and industrial purposes

Characteristics

- No oxygen diffusion
- Leaky if unpressed
- Female thread

Product Details

Product material	Gunmetal
------------------	----------

Scope Of Delivery

- O-ring EPDM

Ordering Information

Article no.	dØ [mm]	Rp ["]	L [cm]	Z [cm]
601.555.00.5	16	1/2	5,6	1,8
601.556.00.5	16	3/4	5,9	1,7
602.555.00.5	20	1/2	5,9	1,8
602.556.00.5	20	3/4	6,1	1,9
603.556.00.5	26	3/4	6,6	1,9
603.557.00.5	26	1	7,1	2,2
604.557.00.5	32	1	6,7	2,2
604.558.00.5	32	1 1/4	7,4	2,3
605.557.00.5	40	1	7,5	2,4
605.558.00.5	40	1 1/4	7,7	2,4
605.559.00.5	40	1 1/2	8,4	2,5
606.559.00.5	50	1 1/2	8,8	2,7
606.560.00.5	50	2	9,7	3,2
607.560.00.5	63	2	12,7	3,3
607.561.00.5	63	2 1/2	13,3	3,5
608.561.00.5	75	2 1/2	14,7	2,9